Expanding Polymer Horizons



Energy Beyond Limits @thisisoq





A SUSTAINABLE FUTURE FOR POLYMERS	 04
About Us	 04
Expanding Polymer Horizons	 04
Increased Production Capacity	 05
What We Offer	 06
FLEXIBLE PACKAGING	08
Overview	08
Food Packaging	09
Luban Product Table	 10
	10
RIGID PACKAGING & DURABLES	 12
Overview	 12
Thin-walled Packaging	13
Bottles	 14
Caps & Closures	 14
Durables	 15
Luban Product Table	 16
INFRASTRUCTURE & CONSTRUCTION	18
Overview	18
Pipes System	19
Tanks & Fittings	20
Geosynthetics	21
Other Construction Applications	21
Luban Product Table	22
AGRICULTURE	23
Luban Product Table	 24
OQ	25
	 25
Together, We Make More Possible	
Contact Us	 26

A SUSTAINABLE FUTURE FOR POLYMERS

ABOUT US

OQ brings together the legacy of nine business units with diverse experiences and expertise.

With an eye on megatrends, our integrated energy company serves as a catalyst merging innovation and technology to develop game-changing, sustainable solutions for consumers across the entire hydrocarbon value chain.





EXPANDING POLYMER HORIZONS


OQ's Liwa Plastics Industry Complex (LPIC) is a world-class integrated refinery and petrochemical facility, taking our capacity for polymer production to a total of 1.5 million tonnes of polyethylene and polypropylene. As LPIC enters into its first year of operations, we are adding new product ranges and applications to our portfolios in flexible packaging, rigid packaging & durables and infrastructure & construction.

INCREASED PRODUCTION CAPACITY

With LPIC, we are primed to meet the steadily increasing global demand for quality PP and PE solutions.










3000+ Customers





Increase in Volume: over 4 times

New Products: 15-20, including Luban PP-H, Luban PP-R, Luban PP-B, Luban HDPE, Luban LLDPE

Expanded Global Footprint: covering more than 85 countries

Enlarged Customer Base: from 400 customers to more than 3000

WHAT WE OFFER

A Gateway to The World:

Accelerated delivery times, due to our strategic location in Oman making us a global hub between East and West.

Seamless Customer Experience: Dedicated customer relations teams in Oman, Singapore and Shanghai to assist you every step of the way.

Emphasis on Innovation: Agility to respond to constantly evolving sustainability guidelines and changing consumer demands and e-commerce requirements.

Supportive Service, the Omani Way: We are committed to the communities we serve, always putting people first.













FLEXIBLE PACKAGING

Flexible packaging is required by many consumer-facing industries like food, electronics, cosmetics, pharmaceuticals and sporting goods. Our polymer solutions offer cost-efficiencies across the value chain, from the point of production to consumers' homes.

Our R&D focuses on developing safe, versatile, easy to use flexible packaging solutions that stand out in the crowded marketplace.



ANUFACTURERS

- Balance: Malleability, Strength
- High Heat Resistance
- High Chemical Resistance
- Better Scratch Resistance
- Durability

	Å 	77	_ #	
6	6	60		$\langle \rangle$
			T	Ĩ

ONVERTERS

- Versatility
- Lightweight, Compact: Cost-efficient Transport
- Ability to Withstand Printing Processes
- Tamper-proof, Barrier Efficient
- Better Optics: Gloss, Clarity, Transparency
- Competitive Advantage: Eye-catching Design

المحمصل

RETAILERS

- Lightweight, Compact: Cost-efficient Transport
- Scratch-resistance
- Attractive Display
- Space Saving: Stackability



END-USERS

- Safe: Barrier Protection
- Ease of Use
- Lightweight
- Saves Space in Home Cupboards
- Enjoyable Design



THE EARTH

- Safe
- Sustainable
- Recyclable
- Better
 Biodegradability

FOOD PACKAGING

OQ's products for food packaging solutions include grades designed for Blown, Cast and Bi-axially Orientated Films, offering a broad range of benefits across the value chain.



Our **versatile** solutions are found across a multitude of industry applications, from labels for plastic bottles, wraps for fruits, frozen food and drink sachets to laminated pouches for food packs, snack products, and pet foods.

They exhibit **durability** from a balance of flexibility and strength with high tenacity and high heat and chemical resistance.

Easy and cost-efficient transport since our solutions are **lightweight**.

They are **compact** and **space-efficient**, saving much needed space in factories, warehouses, supermarket shelves and kitchen cupboards.

Our solutions **support creative design**. The **adaptable aesthetics** of our food packaging solutions ensure eye-catching design possibilities, making your products stand out on a crowded supermarket shelf.

The enhanced barrier protection, high puncture resistance and improved sealing properties of our food packaging solutions extend product shelf life and ensure package integrity, so that they are **safe for our consumers**.

Our solutions are **convenient** and **easy to use** for all our consumers.



Bopp Films



LUBAN PRODUCTS FOR FLEXIBLE PACKAGING

Туре	Grade Name			Ту	pical Re	esin Prop		Attributes										Typical Customer Applications										
Particulars	Particulars	MFR (230°C/2.16kg) [g/10min] ISO 1133	Tensile Modulus [MPa] ISO 527-2	Charpy Notched Impact Strength 23°C [kJ/m²] ISO 179/1eA	MI (190°C/2.16kg) [g/10min] ASTM D1238	MI (190°C/21.6kg) [g/10min] ASTM D1238	Density [g/cm³] ASIM D792	Comonomer	Features	Improved processibility	Excellent drawdown	High tenacity	High stiffness	High puncture resistance	Good impact strength	Good optical properties	Excellent sealing properties	Metalizable	BOPP film - Food & non-food	Blown film - Food & non-food	Cast film - Food & non-food	Stretch film	Industrial packaging	Lamination film	Liners	CF, BCF	Non-Woven Fabrics	Grocery bags, bag on roll
	HP1102K	3.4	1500	4.0	-	-	0.900	-		•													•			•		
	HP1106K	3.0	1400	4.0	-	-	0.900	-		•								-					•			•		
	HP1102LC	5.0	1500	4.0	-	-	0.900	-	CR	•		•											•				٠	
	HP3104K	3.3	1450	4.0	-	-	0.900	-		•						•		•	•								•	
	HP3107K	3.0	1450	4.0	-	-	0.900	-		•						•		٠	•									
НРР	HP4102M	8.0	1500	3.5	-	-	0.900	-		•						•		•		•	٠							
Luban HPP	HP4107N	8.0	1500	3.5	-	-	0.900	-		•						•		•		•	•							
Ē	HP4128N	10.5	1500	3.0	-	-	0.900	-	SA, AB	•						•				•	•							
	HP5101R	24	1500	2.5	-	-	0.900	-	AG	•			1															
	HP5105R	25	1500	2.5	-	-	0.900	-	AG	•																		
	HP5101RC	25	1500	2.5	-	-	0.900	-	AG, CR	•		•																
	HP5101SC	35	1450	2.5	-	-	0.900	-	AG, CR	•																		
CP	RP4202M	6.0	920	4.3	-	-	0.900	C2								•	•			٠	٠							
Luban RCP	RP4203M	8.5	1100	6.0	-	-	0.900	C2								•				•	٠							
LUĎ	RP4225M	8.5	1100	3.4	-	-	0.900	C2	SA, AB	•						•	1			٠	٠							
	DFDA-7047	-	-	-	1.0	-	0.918	C4		•	•					•				•			•	•	•			•
	DFDC-7080	-	-	-	1.0	-	0.918	C4	SA, AB	•	•	+			+	•				٠			•	•	٠			٠
	HPR1018HA	-	-	-	1.0	-	0.918	C6		•	•					•				•		•	•	•	•			•
DPE	HPR2018HA	-	-	-	2.0	-	0.918	C6		•	•					•				٠		•	•	•	•			•
Luban LLDPE	DFDA-7042	-	-	-	2.0	-	0.918	C4		•	•					•				٠	٠	٠	•	•	•			•
Luba	DFDC-7050	-	-	-	2.0	-	0.918	C4	SA, AB	•	•					•	٠			٠		•	•	•	•			•
	DFDA-7059	-	-	-	2.0	-	0.918	C4		•	٠					•	٠			٠		•	٠	٠	٠			٠
	HPR3518CB	-	-	-	3.5	-	0.918	C6		•	•					•	•			٠	٠	•	•	•	•			•
	HD-1059	-	-	-	0.85	57.0	0.961	-		•			•			•				•	٠		•	•	•			
DPE	DGDX-6095	-	-	-	0.05	10.5	0.952	C4		•	•		•							٠					•			•
n HC	DGDZ-6095	-	-	-	0.05	10.5	0.952	C6		•	•		•							٠	•				•			٠
Luban HDPE	DGDX-6097	-	-	-	0.05	10.5	0.948	C4		•	•									•					•			•
	DGDZ-6097	-	-	-	0.05	10.5	0.948	C6		•	•									٠					•			•


Features | AB - Antiblock | AG - Anti Gas Fading | AS - Antistatic | C - Clarified | CR - Controlled Rheology | LT - Long-term Aging Resistance | NU - Nucleated | SA - Slip Agent




RIGID PACKAGING & DURABLES

Rigid plastics represent the fastestgrowing category of re-purposed, multi-use or reusable plastics. OQ offers a range of solutions for a variety of rigid packaging & durables applications across sectors.

MOST COMMON APPLICATIONS

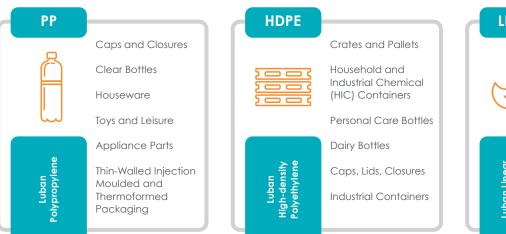





A RANGE OF BENEFITS ACROSS THE VALUE CHAIN













Good Processibility H

y High Stiffness

Good Impact Strength

Good Stiffnes-Impact Balance

Impact Good Optical Properties

Excellent ESCR

- lowered processing costs and improved operating margins
- cost savings due to lightweighting and increased filler loading potential
- standout packaging design due to adaptable aesthetics
- lowered transport and storage costs due to better load stability and improved stackability
- convenience and ease of use for consumers due to versatile flow and physical attributes
- improved produce protection and enhanced food security
- applications can be repurposed and reused, creating opportunities for sustainability

THIN-WALLED PACKAGING

Evolving consumer preferences and the need to comply with complex sustainability and safety regulations require the packaging industry to adapt by way of reduced packaging weight and energy consumption, while offering safer food-contact properties and improved sustainability.

OQ's Luban Polypropylene (PP) range is used in a variety of thin-walled packaging applications in both food and non-food sectors, which require solutions with high fluidity and balanced mechanical properties.






Dairy Packaging

Houseware

Trays and Lids

COMPARED TO TRADITIONAL PACKAGING MATERIALS, **OQ'S LUBAN POLYPROPYLENE IMPACT** AND RANDOM COPOLYMER SOLUTIONS OFFER





BOTTLES

The packaging industry faces constantly evolving regulatory and market demands for safe, cost-effective, aesthetically pleasing and easy-to-use packaging.

Hand in hand with our partners and end users, we develop bottling solutions adapted to their multiple needs, from lightweight properties for **reduced shipping costs**, better package durability for improved **safety**, better clarity for **improved aesthetics**, to a range of resealable closures for **convenience**. Our Luban High-Density Polyethylene (HDPE) and Luban Polypropylene (PP) resins are designed for producing a wide range of blow moulded bottles.

Our solutions can provide clear, gloss or matt surface finishes. The aesthetics provided by our Luban HDPE and Luban PP solutions help converters and brand owners to stand-out in a crowded marketplace.





Household and

Industrial Chemicals (HIC)



Toiletries



Cosmetics

Ê

Water

CAPS & CLOSURES

Rapidly evolving modern lifestyles bring up the need for a wide variety of caps and closures, and the packaging industry has to innovate and keep pace. OQ has a wide portfolio of resin solutions to create effective caps, soft lids, pull rings and closures for a variety of end uses.

OQ's Luban PE and Luban PP solutions meet every need - ease of use, convenience, light weight and food safety. Our caps and closures are tamper evident and secure with attractive aesthetics. Caps and closures also add an important design element to the product pack. Eye-catching colours and novel userfunctionality features can significantly help brand-building efforts.

Our products offer manufacturers **freedom of design**, enabling them to create safe, convenient and attractive closure solutions.



Edible Oils

DURABLES


Common household appliances are a focal point in the consumer rigids segment. Appliances occupy central areas within our living spaces and consumers value aesthetics and design, along with safety, functionality and performance.

Be it houseware, small appliances or components, OQ's technical expertise ensures quality polymer products of the highest safety standards, operational efficiency and durability.









Appliance **Body Parts**



Food Containers



Tovs and Leisure

Luban HDPE solutions for crates and pallets have high **durability** and load-stability, offering reliable support to transport and logistics chains.

Luban Polypropylene (PP) solutions for durables have the versatility necessary to ensure longevity, reliability and safety of house-hold appliances. Luban PP Impact Random Copolyme solutions for housewa toys and leisure produc have the balanced physical properties of excellent stiffness and impact resistance, combined with easy processing and aesthetics.

LUBAN PRODUCTS FOR RIGID PACKAGING & DURABLES

Product Product <t< th=""><th>Туре</th><th>Grade Name</th><th></th><th></th><th></th><th></th><th colspan="8">Attributes</th><th colspan="10">Typical Customer Applications</th></t<>	Туре	Grade Name					Attributes								Typical Customer Applications										
HP2100N 12 1550 3.0 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 - - 0.900 C2 C.AS • • • • • ·	Particulars		MFR (230°C/2.16kg) [g/10min] ISO 1133		Charpy Notched Impact Strength 23°C [kJ/m²] ISO 179/1eA	MI (190°C/2.16kg) [g/10min] ASTM D1238	MI (190°C/21.6kg) [g/10min] ASTM D1238	Density [g/cm³] ASTM D792	Comonomer	Features	Good processibility	High stiffness	Good impact strength	Good stiffnes-impact balance	Good optical properties	Excellent ESCR	Thin-walled articles	Housewares & toys	Caps & closures	Bottles	Furniture	Appliances parts		HIC containers, jerrycan ≤ 20L	Large blow moulding <210L
HP21811 60 1000 20 - - 0.900 C2 . . 0.900 C2 NU 0.900 . 0.900 . 0.900 . </td <td></td> <td>HP1151K</td> <td>3.0</td> <td>1750</td> <td>5.0</td> <td>-</td> <td>-</td> <td>0.900</td> <td>-</td> <td>NU, AS</td> <td></td> <td>•</td> <td></td> <td>•</td> <td></td> <td></td> <td>•</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>		HP1151K	3.0	1750	5.0	-	-	0.900	-	NU, AS		•		•			•								
HP21811 60 1000 20 - - 0.900 C2 . . 0.900 C2 NU 0.900 . 0.900 . 0.900 . </td <td>러</td> <td>HP2100N</td> <td></td> <td>1550</td> <td></td> <td>-</td> <td>-</td> <td>0.900</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>•</td> <td></td> <td></td> <td>•</td> <td>•</td> <td></td> <td>•</td> <td></td> <td></td> <td></td> <td></td>	러	HP2100N		1550		-	-	0.900							•			•	•		•				
HP21811 60 1000 20 - - 0.900 C2 . . 0.900 C2 NU 0.900 . 0.900 . 0.900 . </td <td>n h</td> <td>HP2106N</td> <td>12</td> <td>1550</td> <td>4.0</td> <td>-</td> <td>-</td> <td>0.900</td> <td>-</td> <td></td> <td></td> <td></td> <td></td> <td>•</td> <td>•</td> <td></td> <td></td> <td>•</td> <td>•</td> <td> </td> <td>•</td> <td>•</td> <td></td> <td></td> <td></td>	n h	HP2106N	12	1550	4.0	-	-	0.900	-					•	•			•	•	 	•	•			
HP21811 60 1000 20 - - 0.900 C2 . . 0.900 C2 NU 0.900 . 0.900 . 0.900 . </td <td>bdu</td> <td>HP2100S</td> <td>33</td> <td>1600</td> <td>2.0</td> <td>-</td> <td>-</td> <td>0.900</td> <td>-</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>٠</td> <td></td> <td>•</td> <td>•</td> <td>•</td> <td></td> <td>•</td> <td>•</td> <td>•</td> <td></td> <td></td>	bdu	HP2100S	33	1600	2.0	-	-	0.900	-						٠		•	•	•		•	•	•		
Apple No.00 Apple Apple <th< td=""><td></td><td>HP2151T</td><td>60</td><td>1900</td><td>2.0</td><td>-</td><td>-</td><td>0.900</td><td>-</td><td></td><td>•</td><td>•</td><td></td><td></td><td>•</td><td></td><td>•</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></th<>		HP2151T	60	1900	2.0	-	-	0.900	-		•	•			•		•								
RP2248R 25 1150 6.0 - - 0.900 C2 C. AS Image: Constraint of the state of	0	RP7204G	1.8	1000	20	-	-	0.900	C2		•		•		•					•				•	
RP2248R 25 1150 6.0 - - 0.900 C2 C. AS Image: Constraint of the state of	RCI	RP2248N	11	1150	6.0	-	-	0.900	C2	C, AS			•		•			•	•	•		•			
RP22511 40 1100 5.0 - - 0.900 C2 C, AS • <td>g</td> <td>RP2248R</td> <td>25</td> <td>1150</td> <td>6.0</td> <td>-</td> <td>-</td> <td>0.900</td> <td>C2</td> <td>C, AS</td> <td>•</td> <td></td> <td>•</td> <td></td> <td>•</td> <td></td> <td>•</td> <td>•</td> <td>•</td> <td></td> <td></td> <td>•</td> <td></td> <td></td> <td></td>	g	RP2248R	25	1150	6.0	-	-	0.900	C2	C, AS	•		•		•		•	•	•			•			
RP22511 40 1100 5.0 - - 0.900 C2 C, AS • <td>qn-</td> <td></td> <td>75</td> <td>1100</td> <td>4.5</td> <td>-</td> <td>-</td> <td>0.900</td> <td>C2</td> <td>C, AS, CR</td> <td>•</td> <td>]</td> <td>•</td> <td></td> <td>•</td> <td></td> <td>•</td> <td>•</td> <td>•</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	qn-		75	1100	4.5	-	-	0.900	C2	C, AS, CR	•]	•		•		•	•	•						
EP2300K 4.0 1200 13 - - 0,900 C2 .		RP2251T	40	1100	5.0	-	-	0.900	C2	C, AS	•		•		•		•	•	•						
EP2340L 6.0 1350 16 - - 0.900 C2 NU Image: Constraint of the constrant of the constraint of the constraint of the constraint		EP2302K	3.5	1200	12	-	-	0.900	C2				•					٠	٠		٠	٠	•		
OPUCID EP2380M 7.0 1150 7.0 - - 0.900 C2 AS			4.0	1200	13	-	-	0.900	C2					•				•	•		•		•		
Upped EP2340P 15 1350 7.0 0.900 C2 NU Image: Number of the state		EP2340L	6.0	1350	16	-	-	0.900	C2	NU			•	•			•	•	•	1	•	•	•		
EP2348T 48 1550 5.5 - - 0.900 C2 NU, AS • <td><u>e</u>.</td> <td>EP2380M</td> <td>7.0</td> <td>1150</td> <td></td> <td>-</td> <td>-</td> <td>0.900</td> <td>C2</td> <td>AS</td> <td></td> <td></td> <td>•</td> <td></td> <td></td> <td></td> <td></td> <td>•</td> <td>•</td> <td></td> <td>•</td> <td>•</td> <td>•</td> <td></td> <td></td>	<u>e</u> .	EP2380M	7.0	1150		-	-	0.900	C2	AS			•					•	•		•	•	•		
EP2348T 48 1550 5.5 - - 0.900 C2 NU, AS • <td></td> <td></td> <td>15</td> <td>1350</td> <td>7.0</td> <td>-</td> <td>-</td> <td>0.900</td> <td>C2</td> <td>NU</td> <td></td> <td></td> <td>•</td> <td>•</td> <td></td> <td></td> <td>•</td> <td>•</td> <td>•</td> <td></td> <td>•</td> <td>•</td> <td>•</td> <td></td> <td></td>			15	1350	7.0	-	-	0.900	C2	NU			•	•			•	•	•		•	•	•		
EP2348T 48 1550 5.5 - - 0.900 C2 NU, AS • <td>pa</td> <td></td> <td></td> <td>1400</td> <td></td> <td>-</td> <td>-</td> <td>0.900</td> <td></td> <td>NU, AS</td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td></td> <td></td> <td></td> <td>•</td> <td>•</td> <td></td> <td>•</td> <td>•</td> <td>•</td> <td></td> <td></td>	pa			1400		-	-	0.900		NU, AS	•	•	•	•				•	•		•	•	•		
EP2348UC 70 1450 4.0 - - 0.900 C2 NU, AS, CR • <td< td=""><td>2</td><td>EP2348S</td><td>35</td><td>1550</td><td>6.0</td><td>-</td><td>-</td><td>0.900</td><td>C2</td><td>NU, AS</td><td>•</td><td>•</td><td>•</td><td>•</td><td></td><td></td><td></td><td>•</td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td></td><td></td></td<>	2	EP2348S	35	1550	6.0	-	-	0.900	C2	NU, AS	•	•	•	•				•	•		•	•	•		
EP2300V 100 1300 2.5 - - 0.900 C2 •		EP2348T	48	1550	5.5	-	-	0.900	C2	NU, AS				•			•	•	•		•	•	•		
DNDC-7150 - - 3.5 - 0.939 C6 UV •		EP2348UC	70	1450	4.0	-	-	0.900	C2	NU, AS, CR	•	•	•	•			•	٠	٠				•		
DNDC-7152 - - 3.5 - 0.939 C6 •		EP2300V	100	1300	2.5	-	-	0.900	C2		•			•			•						•		
Bill		DNDC-7150	-	-	-	3.5	-	0.939	C6	UV	•					•		•			•				
DNDA-8320 - - 20 - 0.724 C4 • • • • DNDA-8350 - - 50 - 0.926 C4 • • • • • DMDX-6147 - - 0.05 9.0 0.948 C4 • • • • •		DNDC-7152	-	-	-	3.5	-	0.939	C6		•		•			٠									
DNDA-6320 - - 20 - 0.724 C4 • • • • • DNDA-8350 - - 50 - 0.926 C4 • • • • • • DMDX-6147 - - 0.05 9.0 0.948 C4 • • • • •	DPE	LL-8446.21	-	-	-	5	-	0.936	C4	UV	•		•					٠			•				
DMDX-6147 - - 0.05 9.0 0.948 C4 •		DNDA-8320	-	-	-	20	-	0.924	C4		•		•					•	•				•		
		DNDA-8350	-	-	-	50	-	0.926	C4		•		•					٠	•				•		
DMDZ-6147 - - 0.05 9.0 0.948 C6 •		DMDX-6147	-	-	-	0.05	9.0	0.948	C4		•	•	•			٠					•				
DMDA-6200 - - 0.42 33 0.953 C6 •	ш	DMDZ-6147	-	-	-	0.05	9.0	0.948	C6		•	•	•			٠					٠				•
DMDH-6400 - - 0.73 57 0.960 - •	- d		-	-	-			0.953			•	•	•			•				•	•	1		•	
			-	-	-						•	•	•							•					
DMDA-8007 8.0 - 0.965 C4	_ qn	DMDA-8007	_	-	-	8.0	-	0.965	C4				•					•	•			1			
HMA-016 20 - 0.956 C4				-	-				1																

Features | AB - Antiblock | AG - Anti Gas Fading | AS - Antistatic | C - Clarified | CR - Controlled Rheology | LT - Long-term Aging Resistance | NU - Nucleated | SA - Slip Agent




INFRASTRUCTURE & CONSTRUCTION

OQ aims to partner with our customers and other value chain players to develop innovative, durable and high-quality solutions for the Infrastructure & Construction industry.

By utilizing our state-of-the-art Product Application and Development Centre in Suhar, and working closely with our expert technical team, our customers have powered new possibilities for a wide range of construction and infrastructure projects worldwide.

We offer **individually tailored support** and high-performance **Luban Polypropylene** (PP) and **Luban Polyethylene** (PE) raw materials to our customers across the entire project journey, from innovation to product design, testing, specifications, final product and market launch.



Our Infrastructure & Construction solutions offer secure, reliable and value-yielding **replacements to traditional materials** with minimized impact on the environment. The **high tenacity and stiffness** of our products, combined with their **excellent ESCR** and **good impact strength** ensure solutions that are efficient, durable and stable for a wide variety of applications.




PIPES SYSTEM

Pipes and fittings represent the most significant application area of polymers in the Infrastructure & Construction industry, used across a wide range of applications.



OQ's advanced raw materials used in the production of pipes offer high melt strength, good stiffness/impact balance and excellent long-term pressure resistance at high temperature.

Raw materials used in the manufacturing of pipes and fittings must be of a high enough standard to support the development of sustainable Infrastructure & Construction projects with a **minimum lifespan of 50 years.**

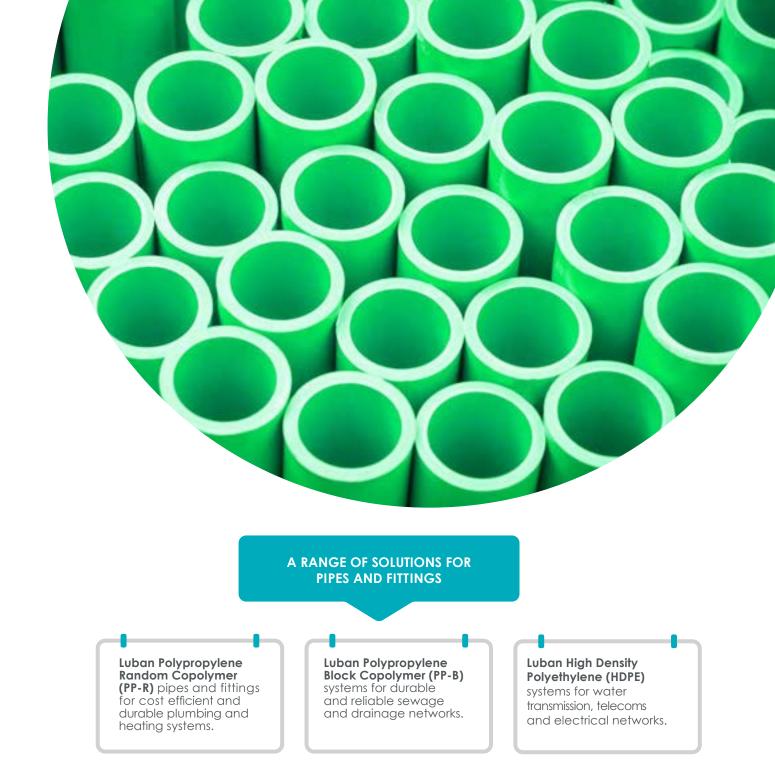

TANKS & FITTINGS

OQ's raw materials allow our customers to produce tanks and fittings that comply with stringent regulations for the **safe storage and transportation** of hazardous and non-hazardous goods.

Industrial and construction sites need dependable solutions for optimal **protection and containment** of solids, liquids and gases. Our raw materials help in the design and manufacture of better-performing tanks of various sizes for a variety of applications. International standards for wastewater management require the production of **durable**, **environmentally responsible** industrial water tanks capable of meeting the demanding applications of the petrochemical sector, refineries, steel sector, food industry and the paper industry. In addition to protecting the earth from wastewater, the water tanks also need to be fitted with covers to **abate evaporation**, **emissions and odours**.

FOR LARGE SPIRAL-WOUND STORAGE TANKS

Tanks and Storage Containers

> Manholes and Chambers

Rainwater Harvesting Systems Luban High Density Polyethylene (HDPE)

Luban Polypropylene Block Copolymers (PP-B)

FOR DURABLE OUTDOOR STORAGE TANKS AND CONTAINERS

Luban High Density Polyethylene (HDPE) Luban Linear Low-Density Polyethylene (LLDPE)



GEOSYNTHETICS

OQ manufactures a range of raw materials for some of the Infrastructure & Construction industry's most advanced groups of geosynthetic heavy-duty polymeric liners. Our products offer outstanding chemical resistance, weathering characteristics and the highest weight to strength ratio available.

OQ's solutions for geotextiles are made from **Luban PP-H**.

Geotextiles are advantageous solutions in Infrastructure & Construction projects due to their versatility, light weight nature, resistance to corrosion durability and permeability.

When used in association with so they have the ability to separate, filte reinforce, protect or drain.





OTHER CONSTRUCTION APPLICATIONS

OQ's best-in-class polymer raw materials are used to produce barriers to keep roads, construction sites and restricted areas safe and secure.

Our solutions for road and construction sites comprise of:

Luban Linear Low-Density Polyethylene (LLDPE)

Luban High-Density Polyethylene (HDPE)

It is important for these systems withstand extreme weather conditic with ease, surviving punishing cold, w and heat.

Railroads

Our raw materials have **heavy-du properties** specifically developed for t unique performance demands construction and building sites, roc and highways.



LUBAN PRODUCTS FOR INFRASTRUCTURE & CONSTRUCTION

Туре	Grade Name			Ту	/pical Re			Attril	outes			Typical Customer Applications														
Particulars	Particulars	MFR (230°C/2.16kg) [g/10min] ISO 1133	Tensile Modulus [MPa] ISO 527-2	Charpy Notched Impact Strength 23°C [KJ/m ²] ISO 179/1eA	MI (190°C/2.16kg) [g/10min] A5TM D1238	MI (190°C/21.6kg) [g/10min] ASTM D1238	Density [g/cm³] ASTM D792	Comonomer	Features	Good processibility	High tenacity	High stiffness	Good impact strength	Good stiffnes-impact balance	Excellent ESCR	Geosynthetics	Water proof membrance/coating	Large size tanks & storage containers	Medium size tanks, road barrier	Hot & cold water pipes/fittings	Conduit pipes	Pressurized pipe systems	Sewage, manholes	Manholes and chambers	Construction barrier fence	Artificial grass
	HP1102K	3.4	1500	4.0	-	-	0.900	-								•									•	•
<u>с</u>	HP1106K	3.0	1400	4.0	-	-	0.900	-								•				J						
H H	HP5101LC	5.0	1550	3.0	-	-	0.900	-	CR, AG		•					•										
Luban HPP	HP5101RC	25	1500	2.5	-	-	0.900	-	CR, AG		٠					•	•									
	HP5101SC	35	1500	2.5	-	-	0.900	-	CR, AG	•						•	•									
RCP	RP6207B	0.3	950	23	-	-	0.900	C2	LT				•							•						
	EP2302K	3.5	1200	12	-	-	0.900	C2					٠	•		•										
۰. ۲	EP2300K	4.0	1200	13	-	-	0.900	C2					٠	•		•										
<u> </u>	EP2340L	6.0	1350	16	-	-	0.900	C2	NU				•	•	-	•										
	EP6387U	0.3	1100	56	-	-	0.900	C2	LT				•	•	-						•	•	•	•		
	DFDA-7042	-	-	-	2.0	-	0.918	C4		•			٠													•
	DFDA-7059	-	-	-	2.0	-	0.918	C4		•			٠													•
ш. Ш	HPR3518CB	-	-	-	3.5	-	0.918	C6		•			٠		•											•
Luban LLDPE	DNDC-7150	-	-	-	3.5	-	0.939	C6	UV	•		1	•		•			•						•		
ogn	DNDC-7152	-	-	-	3.5	-	0.939	C6		•			•					•						•		
3	LL-7150	-	-	-	3.5	-	0.937	C4	UV	•			•						٠					•		
	LL-8446.21	-	-	-	5.0	-	0.936	C4	UV	•			•			-			•					•		
	DNDA-8320	-	-	-	20	-	0.924	C4		•			•				•									
	DNDA-8350	-	-	-	50	-	0.926	C4		•			٠				٠									
	DGDZ-2400	-	-	-	-	9.5	0.940	C6		•			•		•						٠	٠	•	•		
HDPE	DGDZ-6097	-	-	-	0.05	10.5	0.948	C6		•		•													٠	
	DGDZ-6095	-	-	-	0.05	10.5	0.952	C6		•		•													•	

Features | AB - Antiblock | AG - Anti Gas Fading | AS - Antistatic | C - Clarified | CR - Controlled Rheology | LT - Long-term Aging Resistance | NU - Nucleated | SA - Slip Agent



LUBAN PRODUCTS FOR AGRICULTURE

Туре	Grade Name			Т	ypical Re	esin Prop	erties						A	ttribut	es			Typical Customer Applications								
Particulars	Particulars	MFR (230°C/2.16kg) [g/10min] ISO 1133	Tensile Modulus [MPa] ISO 527-2	Charpy Notched Impact Strength 23°C [kJ/m²] ISO 179/1eA	MI (190°C/2.16kg) [g/10min] A5TM D1238	MI (190°C/21.6kg) [g/10min] ASTM D1238	Density [g/cm³] ASIM D792	Comonomer	Features	Good processibility	Excellent drawdown	High stiffness	High puncture resistance	Good impact strength	Good optical properties	Good bubble stability	Excellent sealing properties	Excellent ESCR	Fertilizer bag, leno bag & tarpaulins	Nonwoven crop covers	Greenhouse film	Mulch film	Silage film	Pesticide containers	Pesticide spray tanks	Irrigation tubes
	HP1102K	3.4	1500	4.0	-	-	0.900	-			•								•							
4	HP1106K	3.0	1400	4.0	-	-	0.900	-			•								•							
Luban HPP	HP1102LC	5	1500	4.0	-	-	0.900	-	CR	•	٠								•							
Lub	HP5101RC	25	1500	2.5	-	-	0.900	-	CR, N, AG		•									•						
	HP5101SC	35	1450	2.5	-	-	0.900	-	CR, N, AG	•	٠									•						
	DFDA-7047		-	-	1.0	-	0.918	C4			•			•	•	•					•		•			
	DFDC-7080	-	-	-	1.0	-	0.918	C4	SA, AB		•			•	•	•					•		•			
	DFDA-7042	-	-	-	2.0	-	0.918	C4			•			•	•	•					•	•	•			
	DFDC-7050	-	-	-	2.0	-	0.918	C4	SA, AB		•			•	•	•					•	•	•			
	DFDA-7059	-	-	-	2.0	-	0.918	C4		•	•			•	•	•					•	•	•			
Luban LLDPE	HPR1018HA	-	-	-	1.0	-	0.918	C6			•		•	•	•	•	•				•		•			
an L	HPR2018HA	-	-	-	2.0	-	0.918	C6			•		•	•	•	•	•				•		•			
LUD	HPR3518CB	-	-	-	3.5	-	0.918	C6		•	•		•	•	•		•				•	•	•			
	DNDC-7150	-	-	-	3.5	-	0.939	C6	UV					•				•							•	
	DNDC-7152	-	-	-	3.5	-	0.939	C6						•				•							•	
	LL-7150	-	-	-	3.5	-	0.937	C4	UV					•											•	
	LL-8446.21	-	-	-	5.0	-	0.936	C4	UV	•		-		•											•	
OPE	DMDX-6147	-	-	-	0.05	9.0	0.948	C4		•		•		•				•						•	•	
Luban HDPE	DMDZ-6147	-	-	-	0.05	9.0	0.948	C6		•		•		•				•						•	•	
upa	DMDA-6200	-	-	-	0.42	33	0.953	C6		•		•		•										•		
	DGDZ-2400	-	-	-	-	9.5	0.940	C6		•				•				•								•

Features | AB - Antiblock | AG - Anti Gas Fading | AS - Antistatic | C - Clarified | CR - Controlled Rheology | LT - Long-term Aging Resistance | SA - Slip Agent

TOGETHER, WE MAKE MORE POSSIBLE

Our origins can be traced back to more than a century ago. From the discovery of the OXO process, to the founding of the Oman Refinery Company in 1982, to the creation of OQ, we have continually evolved to serve our partners.

At the end of 2019, OQ was created as a diversified energy company by integrating nine state-owned legacy energy companies in Oman. Now, OQ serves as a catalyst to optimise solutions for all our partners and clients, spanning the entire hydrocarbon value chain, from upstream to midstream and downstream, including supply and trading sectors.

We operate in 17 countries worldwide, and our fuels and chemicals are sold in over 60 countries, making us a prominent player in the energy sector.

We have our sights set on an ambitious future supported by robustly planned investments and increased production capacities.



CONTACT US







